

LINYOPACK

Specialists in Spout Pouch Packaging

Freshness & Convenience, Redefined

Spout Pouch Packaging Solutions

For Rice, Grains & Other Granular Products




WeChat Channel

Hebei LingU Intelligent Equipment Co., Ltd.



Official Website

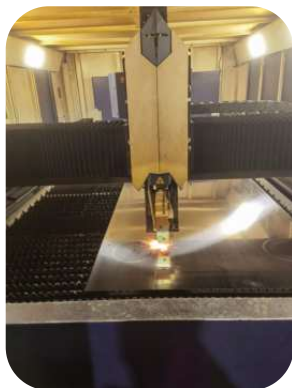

High-tech Enterprise

For consistent machine performance, we manage design, sheet-metal fabrication, mechanical assembly and commissioning in-house.



Selected Customers

Examples shown; no ranking implied.



Spout Pouch Weighing, Filling & Capping Machine *LU-HKG-600PRO*



**Manual pouch & cap loading → Air opening → Weighing & filling
(Air evacuation & nitrogen flushing) → Automatic capping → Discharge**

- Dual-hopper weighing, filling and capping with servo control.
- Fills two pouches at once. Servo torque control allows adjustment of cap tightness.
- 304 stainless steel for product-contact parts.
- Touchscreen interface and centralized PLC control with real-time operating status.
- Self-diagnostics and automatic fault handling for straightforward maintenance.
- One operator loads the pouches and caps. Designed to replace 2-3 manual positions, reduce handling and improve productivity.



LU-HKG-600PRO | TECHNICAL DATA

Pouch type	Angled-spout stand-up pouch; 33 mm spout
Output	450-700 pouches/hour
Weighing range	1-5 kg
Accuracy / scale division	X(0.5) / 1 g
Power supply	AC 220 V, 50 Hz, 1Ph + N + PE
Power	3 kW
Air pressure	> 0.6 MPa
Air consumption	18 m ³ /h
Machine weight	830 kg
Dimensions (L × W × H)	1700 × 1730 × 2630 mm



APPLICATIONS: Rice, millet, mixed grains, beans, coffee beans, sesame, corn grits, multigrain brown rice, tricolor quinoa, pet food, cat litter and hamster sand.

High-Speed Spout Pouch Weighing, Filling & Capping Machine *SPFC-1200R*

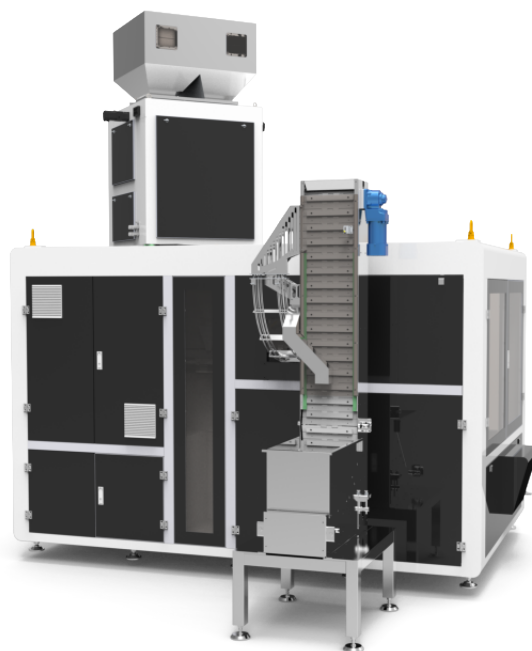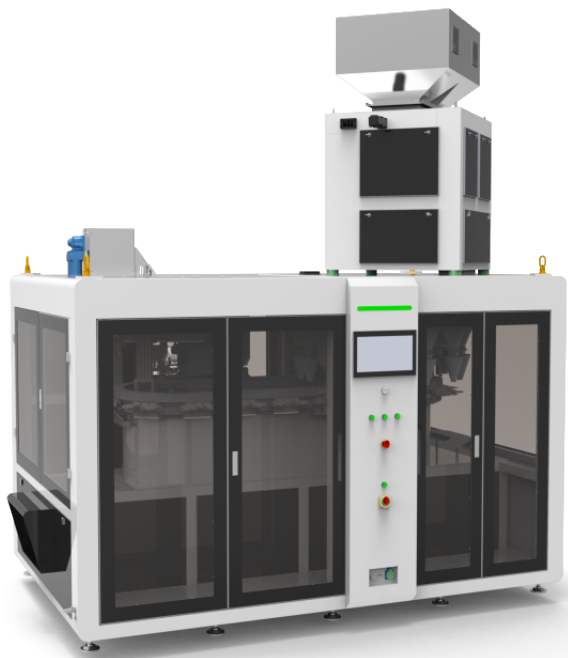

Manual / automatic pouch loading → Air opening → Synchronized filling
(Air evacuation & nitrogen flushing) → Cap sorting & feeding → Capping
(Induction sealing) → Laser coding → Discharge

- Dual-hopper high-speed servo weighing; circular transport structure with automatic cap sorting and feeding.
- Two-pouch synchronized filling and servo torque-controlled capping with adjustable cap tightness.
- 304 stainless steel product-contact parts.
- 15-inch HD touchscreen, centralized PLC control and real-time operating status.
- Self-diagnostics and automatic fault handling for easy maintenance.
- Options: air evacuation / nitrogen flushing, foil induction sealing, pouch burst detection, material discharge detection and AI visual spout / cap inspection.

SPFC-1200R | TECHNICAL DATA

Pouch type	Angled-spout stand-up pouch; 33 mm spout
Output	1200-1400 pouches/hour
Weighing range	1-5 kg
Accuracy / scale division	X(0.5) / 1 g
Power supply	AC 380 V, 50 Hz, 3Ph + N + PE
Installed Power	7.02 kW (including weighing system)
Air pressure	> 0.6 MPa
Air consumption	26 m ³ /h
Machine weight	2650 kg
Dimensions (L × W × H)	3130 × 2930 × 3480 mm


APPLICATIONS: Rice, millet, mixed grains, beans, coffee beans, sesame, corn grits, multigrain brown rice, tricolor quinoa, pet food, cat litter and hamster sand.

Optional equipment: Laser coder +1 kW; induction sealer +2 kW.

Total installed power varies with configuration.



High-Speed Spout Pouch Weighing, Filling & Capping Machine *SPFC-S8*

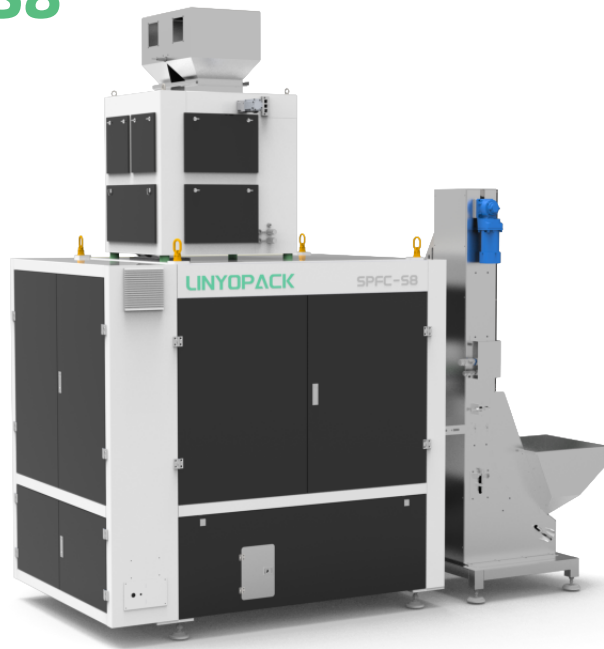

Manual / automatic pouch loading → Air opening → Synchronized filling
(Air evacuation & nitrogen flushing) → Cap sorting & feeding → Capping
(Induction sealing) → Laser coding → Discharge

- Eight-station rotary table handling two pouches per cycle, with synchronized filling; servo control and automatic cap sorting / feeding.
- Two-pouch synchronized filling and servo torque-controlled capping with adjustable cap tightness.
- 304 stainless steel product-contact parts.
- Touchscreen, centralized PLC control and real-time operating status.
- Compact footprint, self-diagnostics and automatic fault handling for easy maintenance.
- Options: air evacuation / nitrogen flushing, foil induction sealing and automatic pouch loading.

SPFC-S8 | TECHNICAL DATA


Pouch type	Angled-spout stand-up pouch; 33 mm spout
Output	1000-1200 pouches/hour
Weighing range	1-5 kg
Accuracy / scale division	X(0.5) / 1 g
Power supply	AC 220 V, 50 Hz, 1Ph + N + PE
Installed Power	7.22 kW (including weighing system)
Air pressure	> 0.6 MPa
Air consumption	26 m ³ /h
Machine weight	1810 kg
Dimensions (L × W × H)	3055 × 1350 × 3140 mm

APPLICATIONS: Rice, millet, mixed grains, beans, coffee beans, sesame, corn grits, multigrain brown rice, tricolor quinoa, pet food, cat litter and hamster sand.

Optional equipment: Laser coder +1 kW; induction sealer +2 kW.
Total installed power varies with configuration.



Integrated Spout Pouch Packaging Lines

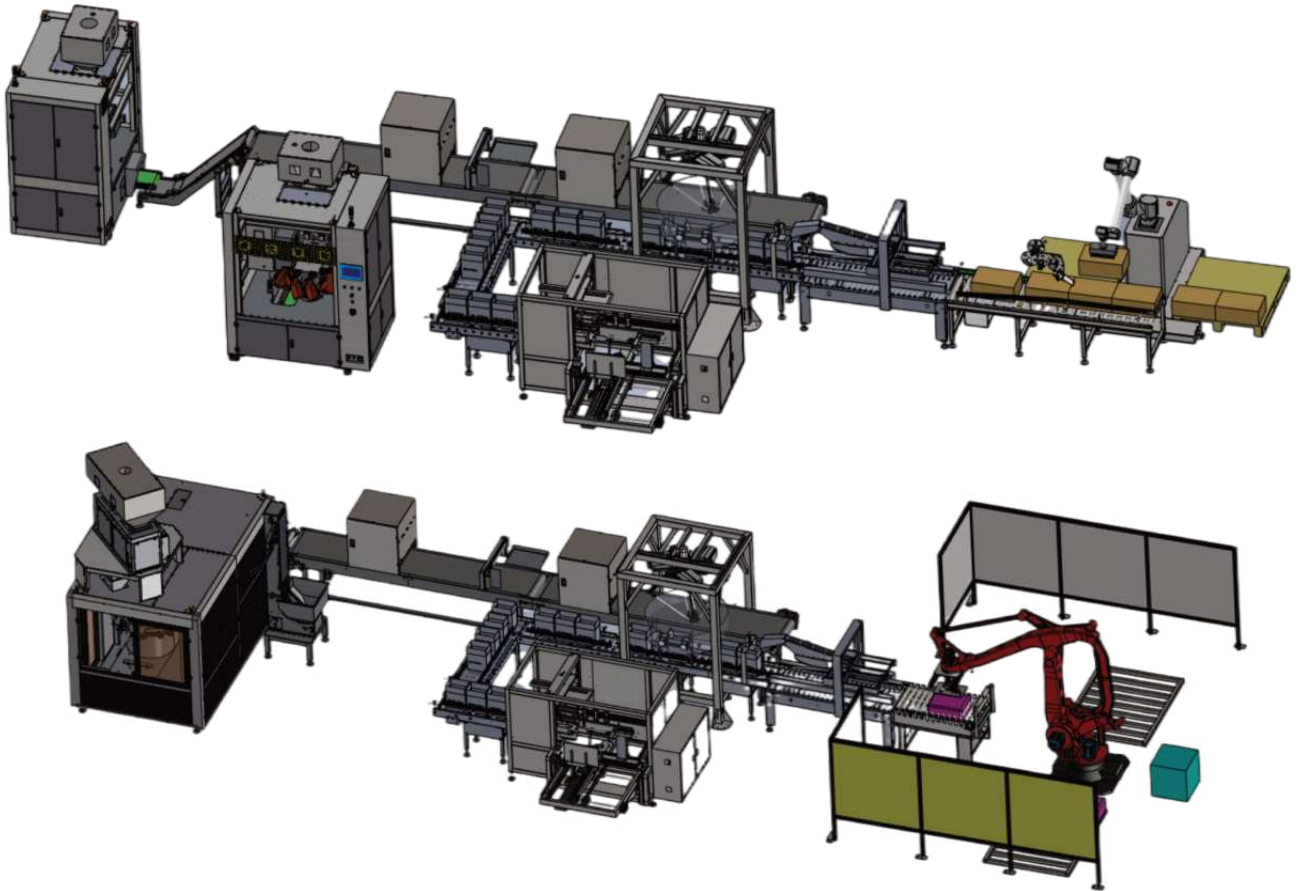

Filled pouch discharge → Laser / inkjet coding → Pouch conveying & alignment
Vision inspection & positioning → Case erecting & feeding → Robotic case packing
Checkweighing → Case sealing → Strapping → Robotic palletizing

LINYOPACK

**Your hands-on packaging upgrade partner,
accountable for throughput and downtime.**



Hebei LingU Intelligent Equipment Co., Ltd.

Address: Building 27, No. 137 Songjiang Road, Shijiazhuang
Economic and Technological Development Zone, Hebei, China

WhatsApp/Tel: +86 189 3116 0320

Email: sales@linyopack.com

Web: www.linyopack.com



WeChat Channel



Official Website